

Certificates

Through years of efforts, Linko is committed to the connector will be in the international leading level, in the field of industrial connector master the core connection technology, with a number of professional R & d team in the aviation connector has obtained a number of international qualification certification.



High and new technology enterprise



Invention Patents



UL Certification



CQC Certification



ISO9001 Certification



RoHS Certification



TUV Certification



IP67 Certification

Engineering R&D team


Passion makes our technical innovation continuously extended and preciseness makes our product quality more guaranteed. Excellent design teams make your ideas come true. Rigorous engineering development process makes every step into order. The international advanced material supply guarantees the quality of each product. It is our permanent mission to make your products more value-added.

- Innovation Ability
- Design Ability
- Test Verification Ability
- Normation And Collaboration
- Team Work



Engineering Process

Linko can support you in every step of the project

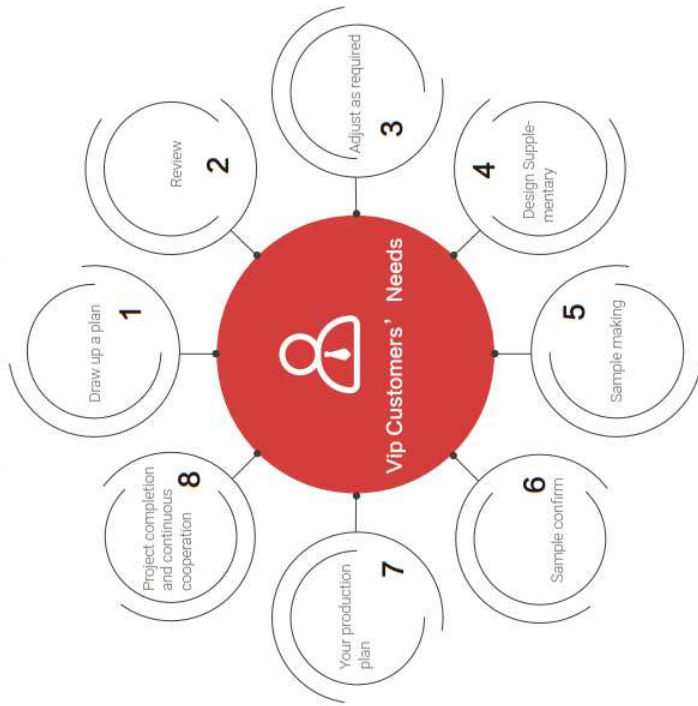

Production

Production

Lean production is our eternal tenet. Continuous improvement is what we are doing every single day. Efficient production capacity, so that each order shipped on time. Automation continues every standard. Linko strongly believes that good quality is adhering to the concept of lean intelligent production, combined with full automation, flexible production and cell production, to meet the production needs of different products.



Delivery Time

From customer requirements to product design and development, LINKO only needs 20 - rigorous process and standard product testing.

Punctual delivery is our commitment to our customers, strict control of the entire supply chain, the implementation of the production process of "Red And Black Single Management", so that customers are satisfied.



Quality

In order to meet the needs of different types of products to achieve fast and effective shipping response. Set up a professional inventory system to meet your shipping needs at least 20,000 sets per day.

Adhere to the principle of "Quality first", implement the whole process of quality monitoring from feeding to discharging, implement CCD and automatic detection, and eliminate mistakes.



Cost

We cherish the cooperation with every customer. In order to rationalize the cost of products and continuously improve the whole process, starting from the design, process, material and efficiency, the production cost is optimized.



CNLINKO Part number Guide

Category 1: Waterproof connector

LP	20	C	03	PE	0	1	001	A
①	②	③	④	⑤	⑥	⑦	⑧ ⑨	⑩
LP/DH/BD/NF/NM/NZ/VA/LK								
① PRODUCT SERIES								
② INSTALLATION SIZE								
12= ϕ 12mm 16= ϕ 16mm 20 = ϕ 20mm 24 = ϕ 24mm 28 = ϕ 28mm								
③ TYPE OF NEEDLE								
C=Male pin, J=Female pin, K=Include male and female pin								
④ PIN NO.								
01= single pin 02=2 pin 03=3 pin 04=4 pin								
⑤ GENDER								
PE=Plug, SX=Socket, PP=In-line connector								
⑥ CONNECTING OF WIRE								
0= Soldering 1= Crimping 2= Screwing 3= Riveting								
⑦ SHELL MATERIAL								
1= plastic+metal, 2= plastic, 3= metal								
⑧ SPECIAL CODE								
0= Plug, 1= Single hole socket, 2= Two-hole flange socket								
4= Four-hole flange socket								
⑨ UPDATE CODE								
01-99								
⑩ A								
Product version								

* The encoding is slightly different for reference standard universal data and signal interfaces such as USB HDMI RJ45 optical fibers
For example:

LP	24	C	/USB3A100/	PE	01	0	01
①	②	③	④	⑤	⑥ ⑦	⑧	⑨
① PRODUCT SERIES							
LP/DH/BD							
② INSTALLATION SIZE							
12= ϕ 12mm 16= ϕ 16mm 20 = ϕ 20mm 24 = ϕ 24mm							
③ TYPE OF NEEDLE							
C=Male pin, J=Female pin							
④ GENDER							
USB/HDMI/RJ45/FO							
⑤ TYPE OF NEEDLE							
PE=Plug, SX=Socket, PP=In-line connector							
⑥ CONNECTING OF WIRE							
0= Soldering 1= Crimping 2= Screwing 3= Riveting							
⑦ MATERIAL							
1= plastic+metal, 2= plastic, 3= metal							
⑧ SPECIAL CODE							
0= plug, 1= Single hole socket, 2= Two-hole flange socket							
4= Four-hole flange socket							
⑨ FLOW CODE							
01-99							

Category 2: Signal, data connector

YT	RJ45	CPE	10	001
①	②	③ ④	⑤	⑥
① PRODUCT SERIES				
YT/YU				
② INTERFACE CATEGORY				
USB/RJ45				
③ Male and female				
C=Male, J=Female				
④ GENDER				
PE=Plug, SX=Socket, PP=In-line connector				
⑤ SERIAL CODE				
10				
⑥ FLOW CODE				
01-99				

LP Quick Push Pull Locking Waterproof Connector

Cnlinko LP series waterproof connectors have been widely used in various challenging environments and occasions with its high precision, high quality automatic plugging and self-locking devices. Such as audio-visual equipment, medical equipment, industrial control, detection and measurement equipment, AV systems, radio and television and communications industry and so on.

Simple operation, fast and stable link device, challenging outdoor waterproof performance. To meet the environmental protection requirements of industrial equipment in the world while satisfying the quality.

- M12-M28
- IP Protection Class (Mated): IP67



Linko LP series multi-applied connector, Simple operation, fast and stable link device, and its outdoor waterproof property has achieved IP67 IP Protection Class. To meet the environmental protection requirements of industrial equipment in the world while satisfying the quality.

- Series product information:

Series: LP-12, LP-16, LP-20, LP-24, LP-28

Hole size: M12, M16, M20, M24, M28


Application type: Multi-core (2, 3, 4, 5, 6, 7, 8, 9, 10, 12, 14, 19, 24pin and customized 3+2, 2+6, 2+7pin)

Signal (RJ45, Fibre)

Data (USB2.0, USB3.0, HDMI)

Material type: plastic, plastic+metal, metal

- Application Of Graphic

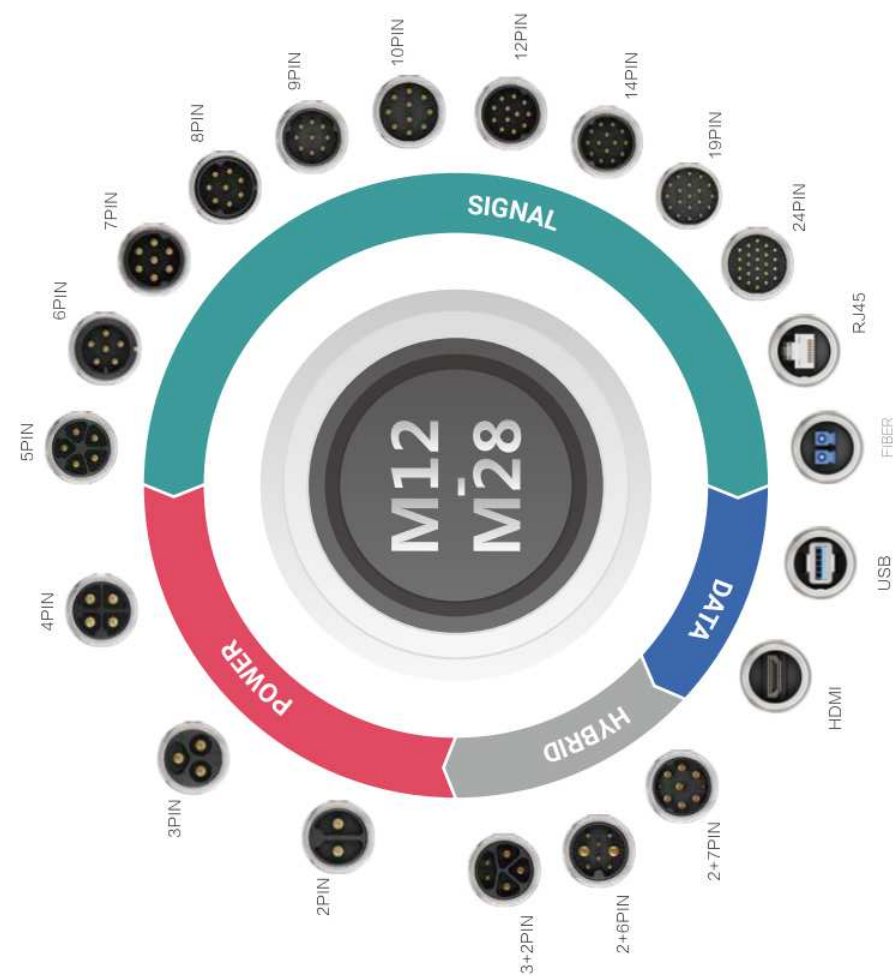

Series information graph

LP-12 series information Graph

Product application type:

Power: 2/3/4/5pin

Signal: 6/7/8pin

The voltage can arrive 250v when the power connection is working, rated current 5A(2~5pin), 3A(6~8pin), the shielded connector can be chosen.

- Multi-core
Cable Range: $\varnothing 3.0 \sim \varnothing 6.0 \text{ mm}$

LP-16 series information Graph

Product application type:

Power: 2/3/4pin

Signal: 5/7/8/9pin, RJ45, Fibre

The voltage rating of power supply connection can reach 500V, 10A(2, 3, 4 cores), 5A(5, 7, 8, 9 cores), the shielded connector can be chosen.

- Multi-core
Cable Range: $\varnothing 3.0 \sim \varnothing 9.0 \text{ mm}$

LP-20 series information Graph

Product application type:

Power: 2/3/4pin

Signal: 5/7/9/12/14pin

The voltage can arrive 500v when the power connection is working, rated current 20A(2, 3, 4pin), 12A(5, 7pin), the shielded connector can be chosen.

- Multi-core
Cable Range: $\varnothing 5.0 \sim \varnothing 13.0 \text{ mm}$

LP-24 series information Graph

Product application type:

Power: 3/4pin

Signal: 10/12/19/24pin, RJ45, Fibre

Data: USB, HDMI

The voltage can arrive 500v when the power connection is working, rated current 25A (3, 4pin), 10A (10, 12pin), 5A (19, 14pin), the shielded connector can be chosen.

- Multi-core
Power Cable range: $\varnothing 9.0 \sim \varnothing 14.0 \text{ mm}$
- Signal Type
RJ45 Cable Range: $\varnothing 5.0 \sim \varnothing 6.5 \text{ mm}$
FIBER Cable Range: $\varnothing 5.0 \sim \varnothing 6.5 \text{ mm}$
- Data Type
USB Cable Range: $\varnothing 5.0 \sim \varnothing 6.5 \text{ mm}$
HDMI Cable Range: $\varnothing 5.0 \sim \varnothing 6.5 \text{ mm}$



LP-28 series information Graph

Product application type:

Power: 2/3pin

Signal: 8pin

The rated voltage of power supply connection can reach 500V, rated current 50A(2pin), 35A (3pin), 15A (8 pin), Shielding connectors are optional.

- Multi-core
Cable Range: $\varnothing 13.0 \sim \varnothing 20.0 \text{ mm}$

Characteristics



Reliable waterproof property

- LP series protection level up to ip67 when mated, for the equipment to provide good electrical protection performance.



Various wiring modes

- LP series waterproof connectors adopts two wiring modes, screwing and soldering (3PIN adopts screwing and soldering at present).



Stable and secure connection

- Use spring button fastening connection, convenient and fast, safe and firm.




Structural Sketch

- Precise structural positioning system ensures the safety and stability of connection performance.



Installation mode

- Linkko LP series products are adopting Flange Mounting, Panel Mounting, installation mode, can be used in front or rear of the plate connection, but also used the board outside line installation mode.

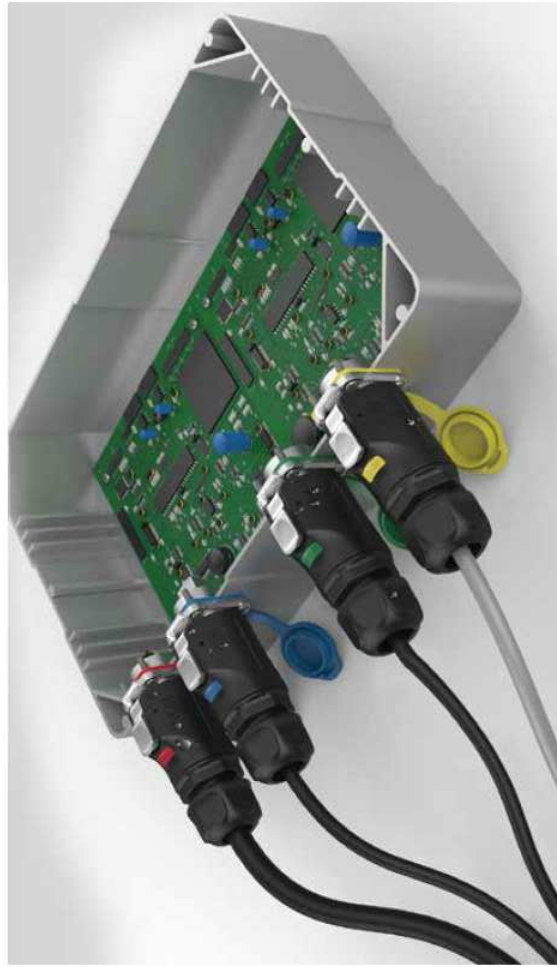

LP-24 be used in Control Box of Machinery Equipment



- In-line connector



- Ergonomic structural process design, built from a harsh testing environment



- Waterproof, High temperature resistance and cold resistance.



- Anti-electronic interference, faster transmission, safer, more stable.

LP-16																				
Product Series	2PIN		3PIN		4PIN		5PIN		6PIN		7PIN		8PIN		9PIN		RJ45	FIBER		
Pin Number	PIN	Mounting	PIN	Mounting	PIN	Mounting	PIN	Mounting	PIN	Mounting	PIN	Mounting	PIN	Mounting	PIN	Mounting				
Section diagram																				
Current Rating	10A								5A								—			
Voltage Rating					AC 400V								AC 250V				—			
Cable range					Ø3.0~Ø9.0mm												—			
Wire Gauge					1.0~1.5mm²/18-16AWG								0.34~0.75mm²/22-20AWG				—			
IP Protection Class (Mated)					IP67 (Mated)															
Termination					Soldering															
PartNumber (The bold font is a best-sell products)																				
material																				
plastic	Male	LP-16-C02PE-02-001	LP-16-C03PE-02-001	LP-16-C04PE-02-001	LP-16-C05PE-02-001	—				LP-16-C07PE-02-001	LP-16-C08PE-02-001	LP-16-C09PE-02-001	—		—		—			
	Female	LP-16-J02PE-02-001	LP-16-J03PE-02-001	LP-16-J04PE-02-001	LP-16-J05PE-02-001	—				LP-16-J07PE-02-001	LP-16-J08PE-02-001	LP-16-J09PE-02-001	—		—		—			
	Male	LP-16-C02PP-02-001	LP-16-C03PP-02-001	LP-16-C04PP-02-001	LP-16-C05PP-02-001	—				LP-16-C07PP-02-001	LP-16-C08PP-02-001	LP-16-C09PP-02-001	—		—		—			
	Female	LP-16-J02PP-02-001	LP-16-J03PP-02-001	LP-16-J04PP-02-001	LP-16-J05PP-02-001	—				LP-16-J07PP-02-001	LP-16-J08PP-02-001	LP-16-J09PP-02-001	—		—		—			
flange mounting	Male	LP-16-C02SX-02-401	LP-16-C03SX-02-401	LP-16-C04SX-02-401	LP-16-C05SX-02-401	—				LP-16-C07SX-02-401	LP-16-C08SX-02-401	LP-16-C09SX-02-401	—		—		—			
	Female	LP-16-J02SX-02-401	LP-16-J03SX-02-401	LP-16-J04SX-02-401	LP-16-J05SX-02-401	—				LP-16-J07SX-02-401	LP-16-J08SX-02-401	LP-16-J09SX-02-401	—		—		—			
Panel Mounting Rear Locking	Male	LP-16-C02SX-02-101	LP-16-C03SX-02-101	LP-16-C04SX-02-101	LP-16-C05SX-02-101	—				LP-16-C07SX-02-101	LP-16-C08SX-02-101	LP-16-C09SX-02-101	—		—		—			
	Female	LP-16-J02SX-02-101	LP-16-J03SX-02-101	LP-16-J04SX-02-101	LP-16-J05SX-02-101	—				LP-16-J07SX-02-101	LP-16-J08SX-02-101	LP-16-J09SX-02-101	—		—		—			

LP-16												
Product Series	2PIN	3PIN	4PIN	5PIN	7PIN	8PIN	9PIN	RJ45	FIBER			
Pin Number	PIN Mounting	PIN Mounting	PIN Mounting	PIN Mounting	PIN Mounting	PIN Mounting	PIN Mounting					
Section diagram												
Current Rating	10A		5A									
Voltage Rating	AC 400V		AC 250V									
Cable range	Ø3.0~Ø9.0mm		0.34~0.75mm²/22-20AWG									
Wire Gauge	1.0~1.5mm²/18-16AWG											
IP Protection Class (Mated)	IP67 (Mated)											
Termination	Soldering											
Part Number (The bold font is a best-sell products)												
material												
Male	LP-16-C02PE-03-001	LP16-C03PE-03-001	LP-16-C04PE-03-001	LP-16-C05PE-03-001	—	LP-16-C07PE-03-001	LP-16-C08PE-03-001	LP-16-C09PE-03-001	—	—		
Female	LP-16-J02PE-03-001	LP-16-J03PE-03-001	LP-16-J04PE-03-001	LP-16-J05PE-03-001	—	LP-16-J07PE-03-001	LP-16-J08PE-03-001	LP-16-J09PE-03-001	—	—		
Male	LP-16-C02PP-01-001	LP-16-C03PP-01-001	LP-16-C04PP-01-001	LP16-C05PP-01-001	—	LP-16-C07PP-01-001	LP-16-C08PP-01-001	LP-16-C09PP-01-001	—	—		
Female	LP-16-J02PP-01-001	LP-16-J03PP-01-001	LP-16-J04PP-01-001	LP-16-J05PP-01-001	—	LP-16-J07PP-01-001	LP-16-J08PP-01-001	LP-16-J09PP-01-001	—	—		
Male	LP-16-C02SX-03-401	LP-16-C03SX-03-401	LP-16-C04SX-03-401	LP-16-C05SX-03-401	—	LP-16-C07SX-03-401	LP-16-C08SX-03-401	LP-16-C09SX-03-401	—	—		
Female	LP-16-J02SX-03-401	LP-16-J03SX-03-401	LP-16-J04SX-03-401	LP-16-J05SX-03-401	—	LP-16-J07SX-03-401	LP-16-J08SX-03-401	LP-16-J09SX-03-401	—	—		
Male	LP-16-C02SX-03-101	LP-16-C03SX-03-101	LP-16-C04SX-03-101	LP16-C05SX-03-101	—	LP-16-C07SX-03-101	LP-16-C08SX-03-101	LP-16-C09SX-03-101	—	—		
Female	LP-16-J02SX-03-101	LP-16-J03SX-03-101	LP-16-J04SX-03-101	LP16-J05SX-03-101	—	LP-16-J07SX-03-101	LP-16-J08SX-03-101	LP-16-J09SX-03-101	—	—		
Male	LP-16-CRJ45/015/PE-43-001											
Female	LP-16-JRJ45/110/SX-02-201											
	LP-16-JRJ45/110/SX-02-202											

M16 Power + Signal	Product Picture	Part Number (The bold font is a best-sell products)											
	Cable connector												
	In-line Cable connector												
	Flange Mounting												
	Panel Mounting Rear Locking												
													

M16
Power + Signal



In-line Cable connector



Flange Mounting





Panel Mounting Rear Locking





LP-16 Appearance Dimension


■ Metal Cable Connector






■ Plastic Cable Connector





■ In-line Cable Connector



■ 2 Holes Flange Mounting



■ 4 Holes Flange Mounting



■ Panel Mounting Rear Locking

